

GOBOLED 80 D | outdoor use





IMAGE PROJECTORS

GOBOLED 80 D

With all the renowned, uncountable advantages of the single powerful LED that is fitted with, the brand new IP65 rated GOBOLED 80 D projects a bright and accurate rendition of graphic designs or logos in outdoor and indoor locations with the help of a dichroic or metal gobo.

GOBOLED 80 D features greatly performing linear 0 to 100% electronic dimmer, strobe (25 FPS max) and blackout facilities. With totally smooth and silent gobo indexation, 4 gobo rotation speeds in both directions can be selected in automatic mode, while, in DMX mode, clockwise and anti-clockwise rotation speeds are growing and adjustable from 0 to 100%. The ventilation system, acting only when necessary, is also distinguished by a totally noiseless operation, whereas manual zoom and focus functions combine with more in-built beam angle tuning options to provide with maximum creativity, dynamism and flexibility the most demanding design and application requirements.

La nuovissima versione D di GOBOLED 80, grazie all'implementazione di altri due canali DMX, è caratterizzata dalla funzione di dimmer (elettronico lineare da 0% a 100%), da effetti di strobo (fino a 25 FPS max) e dal black-out istantaneo. Utilizzando una fonte luminosa a LED da 80W GOBOLED 80 D proietta, con l'ausilio di un gobo dicroico o metallico, logo o altri elementi grafici in ambienti interni e anche esterni, grazie al suo grado di protezione IP65. Con un'indicizzazione estremamente fluida e una rotazione del gobo silenziosa, GOBOLED 80 D, in modalità automatica, consente di scegliere fra 4 velocità di rotazione in entrambe le direzioni, mentre, in modalità DMX, la velocità di rotazione oraria e antioraria è regolabile da 0% a 100%. Il sistema di ventilazione, che si attiva solo in caso di necessità, e la regolazione manuale dello zoom e della messa a fuoco completano la vasta gamma di funzioni che consentono la massima creatività e flessibilità progettuale.

GOBOLED 80 D | outdoor use

TECHNICAL SPECIFICATIONS

1 high brightness 80W power LED unit
 Manual adjustment of focus and linear zoom (19°-35°)
 Linear 0-100% dimmer function
 Strobe function (25 FPS max)
 Electronic blackout
 One rotating gobo slot hosts either metal or glass gobos (ø ext. 53.3 - ø int. 40 mm)
 One dichroic filter can also be used in combination with a metal gobo
 DMX, automatic and Master-Slave mode
 Power supply:
 100-240V / 50-60Hz
 Power consumption: 100W max
 Electrical class: I
 Meets CE safety standards
 Aluminium body with an adjustable mounting yoke
 Projector: IP65
 Cooling system: IP55
 Operating temperature: -20°C to 40°C (-4°F to 104°F)
 8.7 Kg

SPECIFICHE TECNICHE

Proiettore con 1 LED di potenza da 80W
 Regolazione manuale della messa a fuoco e dello zoom lineare (19°-35°)
 Dimmer elettronico lineare 0-100%
 Effetto strobo a velocità max 25 fps
 Blackout elettronico
 Alloggiamento per un gobo rotante in metallo o in vetro (ø est. 53,3 - ø int. 40 mm)
 Consente l'utilizzo di un filtro dichroico in combinazione con un gobo metallico
 Funzionamento in automatico, modalità Master-Slave e controllo remoto DMX
 Alimentazione:
 100-240V / 50-60Hz
 Consumo: 100W max
 Classe elettrica: I
 Rispetta le norme CE
 Corpo in alluminio con staffa di montaggio regolabile
 Proiettore: IP65
 Sistema di raffreddamento: IP55
 Temperatura di utilizzo: da -20°C a 40°C
 8,7 Kg

ACCESSORIES / ACCESSORI



AD4118 POWER CDI COMMANDER 512 (IP65)
AD4119 POWER CDI COMMANDER 1024 (IP65)



AL3360 IP65 WIRELESS DMX RECEIVER



AD4125 POWER CDI COMMANDER EXTRA (IP20)



AL1424 WALL-TSC



GR0250 SAFETY CABLE



AD4126 IP65 DMX CONTROLLER MK2




AL3362 IP20 WIRELESS DMX TRANSMITTER
AL3364 IP65 WIRELESS DMX TRANSMITTER
AL3366 IP65 WIRELESS DMX REPEATER



CODES / CODICI

AL2502 GOBOLED 80 D

IP65 / CE

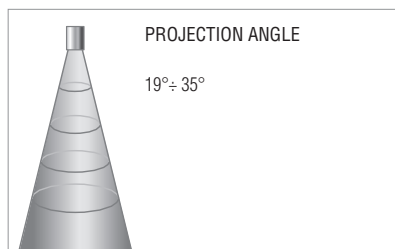

PHOTOMETRIC DETAILS
 AVAILABLE ON OUR WEBSITE
 DATI FOTOMETRICI DISPONIBILI
 SUL NOSTRO SITO

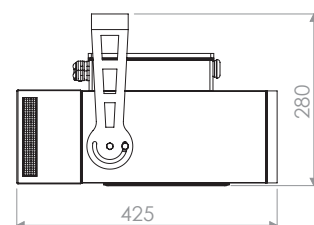



UTMOST CREATIVITY, DYNAMISM AND FLEXIBILITY