


GL 80 LED LED PROJECTOR

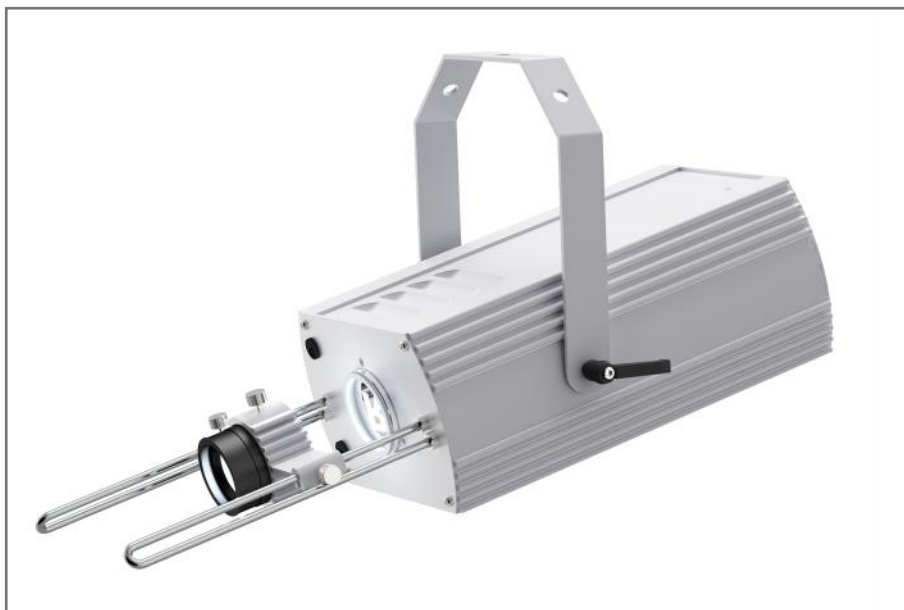

SPECIFICATIONS

item:.....GL 80 LED
body:aluminium
available colours: silver-grey, white
weight:4.35 kg
on / off switch:.....on the rear panel of the device
environmental conditions:..... for dry indoor environments only
cooling:.....active cooling, fan
light source: 80 W Extreme Power LED
recommended projection distance in normal room light: 8 m
recommended projection distance in darkness: 20 m
average lifetime of the LED:30,000 hours
colour temperature:6,500 - 8,000 °Kelvin
luminous flux of the LED: 5,000 Lumen
gobo size / image size:50 mm $\varnothing$ / 42 mm $\varnothing$
input voltage: 100-240 V AC / 50-60 Hz
active power (power consumption):..... 100 W
apparent power:..... 182 VA
efficiency:.....0.55 cos. φ
IEC Protection Class:.....Class I
Ingress Protection Rating:..... IP 2X
changeable lens:..... yes, several focal lengths are available
lighting effects:.....yes, several effect options are available
connectors for effect options:..... 2 x 15 V DC, on the front panel
photobiological safety:..... ICE62471:2006 EN62471:2008: RG-2
item number:..... 20004430 (silver-grey) | 20004410 (white)


COMPONENTS

Standard series with extreme power LED, 85 mm standard lens, power cable with plug. The machine is ready to plug in and run. Required accessories: glass gobo with individually designed motif.



We reserve the right to make technical and optical modifications. Our general terms and conditions apply.

PROJECTION DIAMETER WITH INCREASING DISTANCE

(with Standard Lens, $f=85\text{ mm}$)

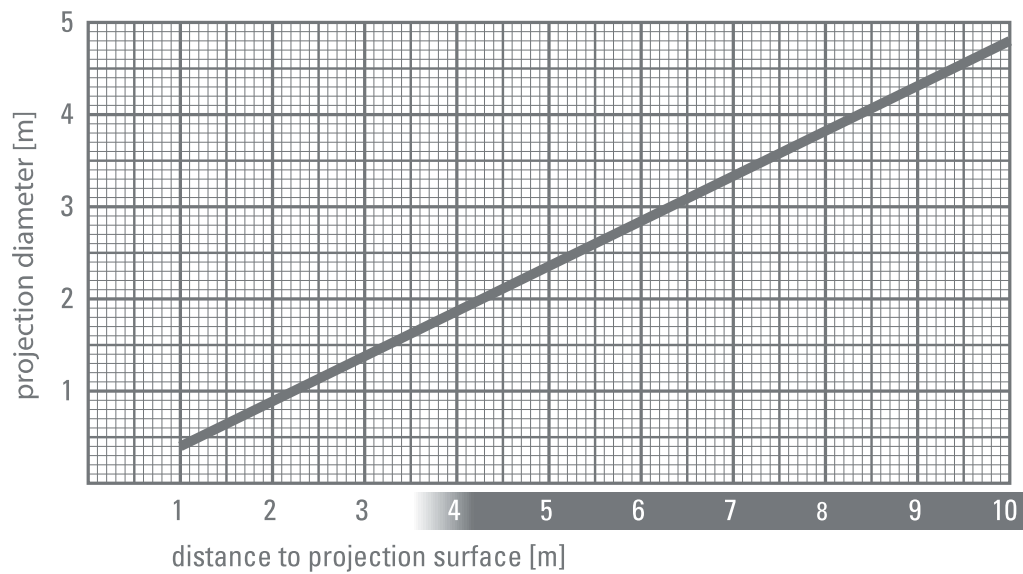

DIMENSIONS

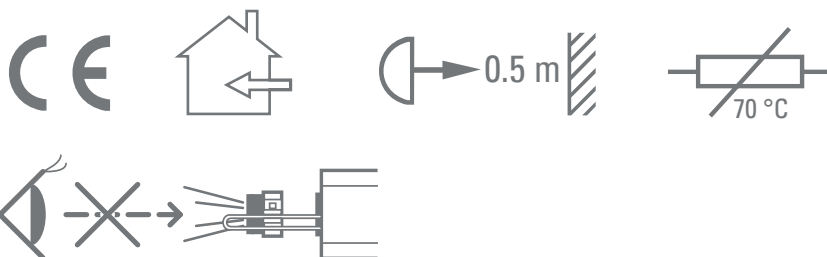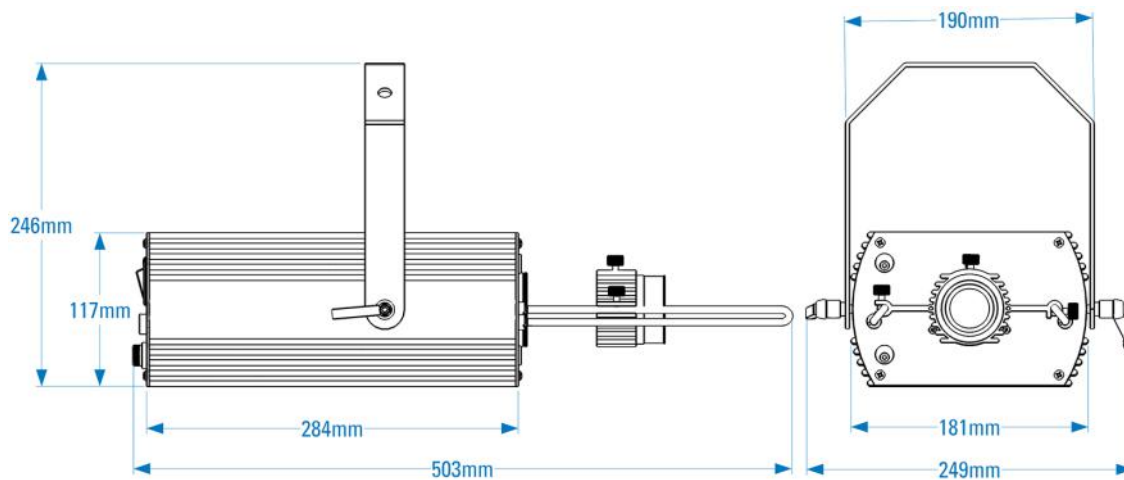

derksen®
lichttechnik

Derksen Lichttechnik GmbH
Sauerlandstraße 5
45889 Gelsenkirchen
Germany

phone: +49 (0) 209 / 980 70-0
fax: +49 (0) 209 / 980 70-60

info@derksen.de
www.derksen.de