

# GL 80 LED outdoor LED PROJECTOR



## SPECIFICATIONS


item:	GL 80 LED outdoor
body:	aluminium
available colours:	silver-grey
weight:	8.1 kg
on / off switch:	not available
environmental conditions:	for outdoor use
cooling:	active ventilation
light source:	80 W Extreme-Power LED
recommended projections distance in normal room light:	8 m
recommended projection distance in darkness:	20 m
average lifetime of the LED:	30,000 operating hours
colour temperature:	6,500 - 8,000° Kelvin
luminous flux of the LED:	5,000 Lumen
gobo size / image size:	50 mm ø / 42 mm ø
voltage:	110 - 127 V AC / 220 - 240 V AC, 50 / 60 Hz
active power (power consumption):	94 W
apparent power:	104 VA
efficiency:	0.9 cos. φ
IEC Protection Class:	Class I
Ingress Protection Rating:	IP 23
changeable lens:	yes, several focal lengths are available
lighting effects:	not available
connectors:	1 x 15 V DC
photobiological safety:	ICE62471:2006 EN62471:2008: RG-2
item number:	20004530 (silver-grey)

## COMPONENTS


Standard series with extreme power LED, 85 mm standard lens, power cable with plug. The machine is ready to plug in and run. Required accessories: glass gobo with individually designed motif.

## PROJECTION DIAMETER WITH INCREASING DISTANCE


(with Standard Lens,  $f=85\text{ mm}$ )

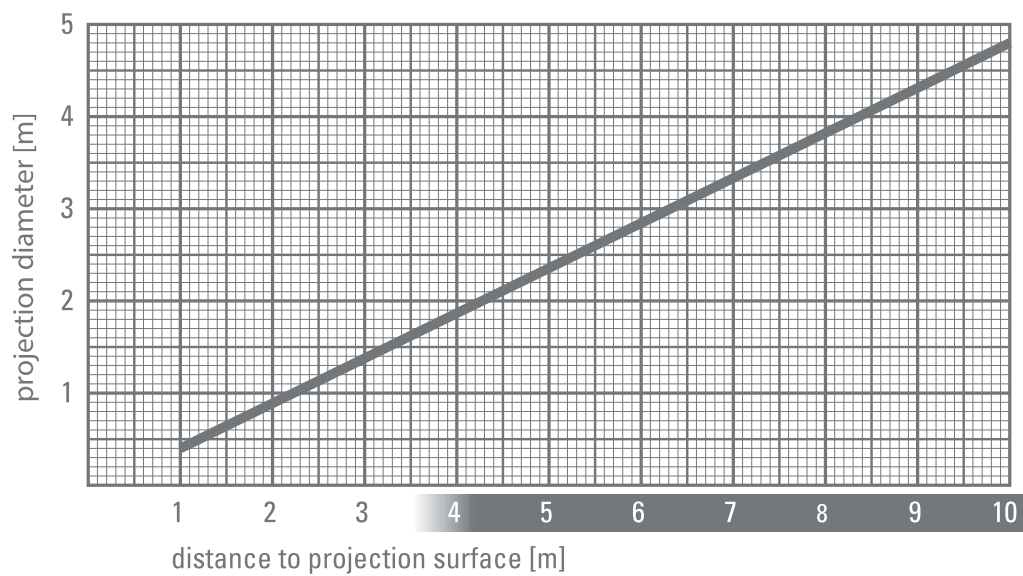

## DIMENSIONS

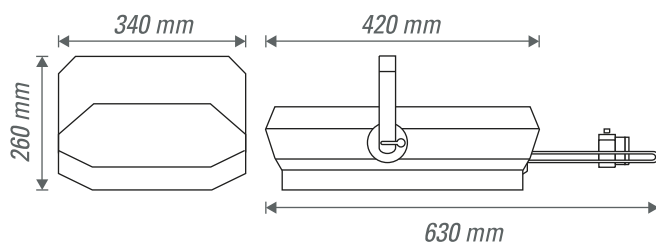

IP 23



**derksen®**  
lichttechnik

Derksen Lichttechnik GmbH  
Sauerlandstraße 5  
45889 Gelsenkirchen  
Germany

Phone: +49 (0) 209 / 980 70-0  
Fax: +49 (0) 209 / 980 70-60

info@derksen.de  
www.derksen.de